

Self-Contained Compactor


Description

A powerful commercial compactor that remains stationary while in operation. Waste is loaded into the hopper and compacted into the body of the unit. These units are capable of storing and transporting wet waste. They are recommended for restaurant and cafeteria waste as well as small material waste. The entire compactor and integrated container are transported to the landfill for emptying.



Specs

- ✔ Minimum WASTEC rating 1.3 cy capacity
- ✔ Minimum clear top opening: 35" x 55"
- ✔ Motor size: 10 HP
- ✔ Minimum 48" ground feed height
- ✔ Minimum 7 gauge floor and sides
- ✔ Rebuilt cylinder(s)
- ✔ Add new hydraulic hoses, fittings, oil and filters
- ✔ Clearly marked controls
- ✔ Safety switches on all service doors
- ✔ Safety decals
- ✔ Cleaned and painted
- ✔ ANSI Z245.2 compliance
- ✔ Equipment comes with a warranty
- ✔ Rentals come with full maintenance

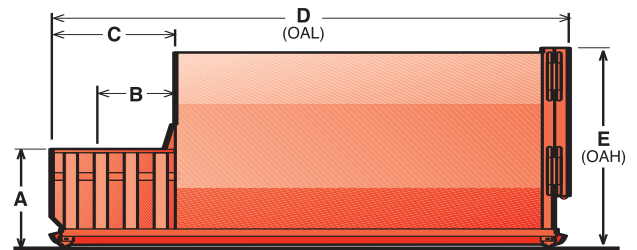

Dimensions not shown: 8'-4-1/8" (2543mm) Overall Width
 Ground Roller Widths: 61 7/8" (1569mm) Inside Rollers
 67 3/8" (1712mm) Roller Centers
 72 7/8" (1851mm) Outside Rollers



Distributor:

Greenleaf Compaction, Inc.

4001 N. 3rd St., Suite 480
 Phoenix, AZ. 85012
 1-800-932-7718

www.GreenleafCompaction.com

RJ-250SC	A	B	C	D**	E	LBS.
15 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	14' - 3" 4343mm	7' - 5" 2261mm	8,860 4019kg
20 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	17' - 4" 5283mm	7' - 5" 2261mm	9,520 4318kg
25 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	17' - 10" 5436mm	8' - 8" 2642mm	10,030 4550kg
30 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	20' - 5" 6223mm	8' - 8" 2642mm	10,620 4818kg
34 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	22' - 5" 6833mm	8' - 8" 2642mm	11,130 5049kg
39 cu yds	4' - 0" 1219mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	24' - 11-1/2" 7607mm	8' - 8" 2642mm	11,790 5348kg
RJ-250HT	A	B	C	D**	E	LBS.
25 cu yds	4' - 1" 1245mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	20' - 9-1/2" 6337mm	8' - 6" 2591mm	11,104 4173kg
29 cu yds	4' - 1" 1245mm	3' - 7-1/4" 1099mm	5' - 7" 1702mm	23' - 1" 7036mm	8' - 6" 2591mm	11,604 5264kg

* Overall height with hydraulic tailgate raised: 16'-6". Hoist should be equipped with selector valve (1500 psi minimum) in order to control hydraulic tailgate.

** Other lengths available. Call factory for details.